
Rev.0: 2010.3.24

HT-4139 Packing & Unpacking Procedure

1. Unpacking Outer Packaging


(1) Cut 2 Band(1)s.

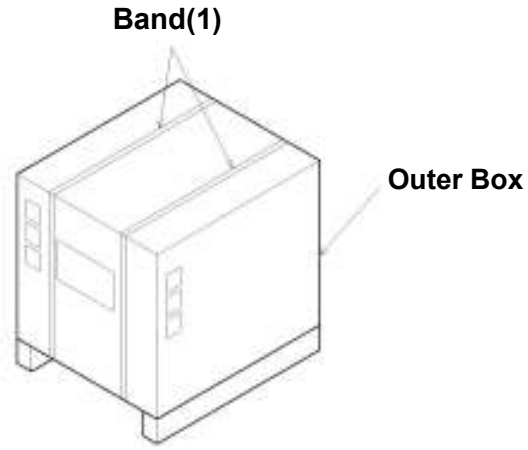

(2) Remove the top part of Outer Box.

(3) Lift the Inner Box out from the Base Material.


CAUTION: The Inner Box weighs approximately 70 Kg (150 lb). Lift it up safely with more than 3 people.

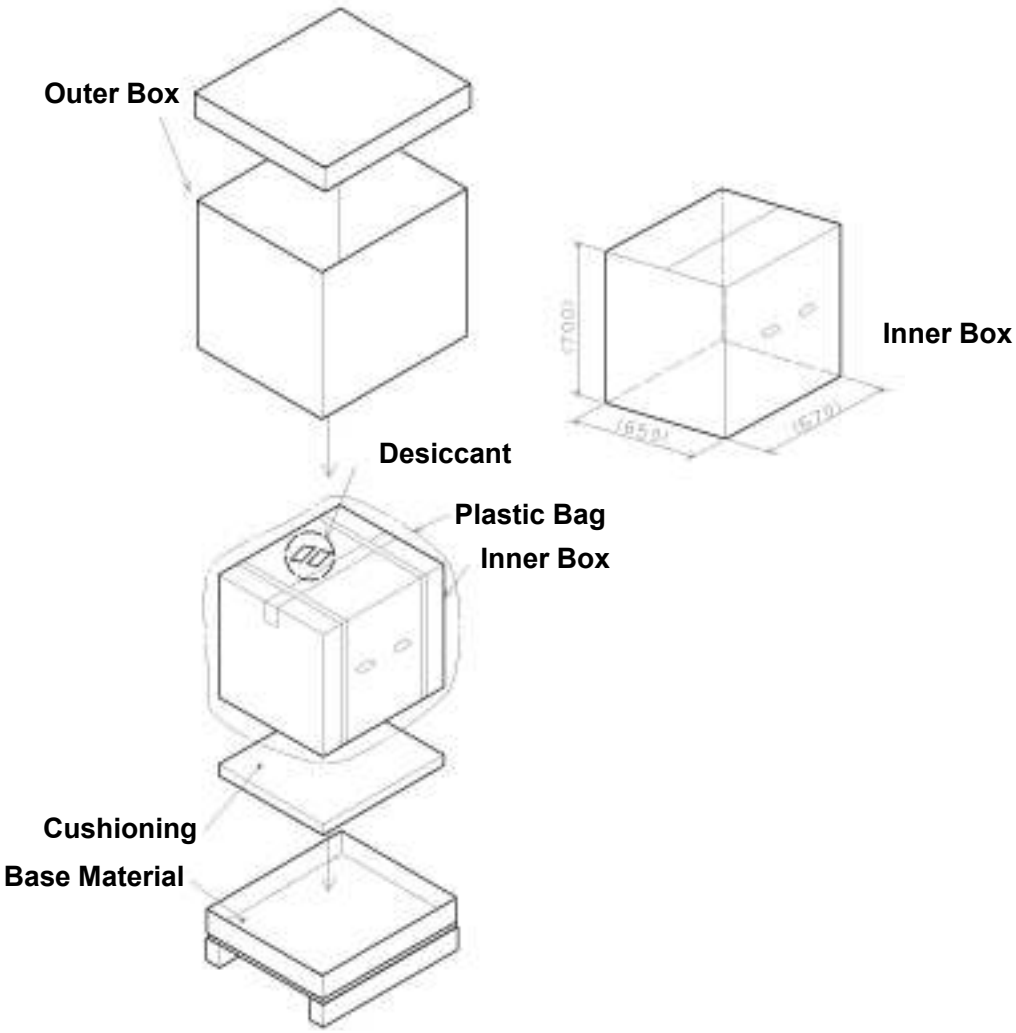

2. Unpacking Inner Packaging

(1) Cut 2 Band (2)s and remove Adhesive Tapes.

(2) Remove a Cover and take out the Box-1 and the Scanner Unit.

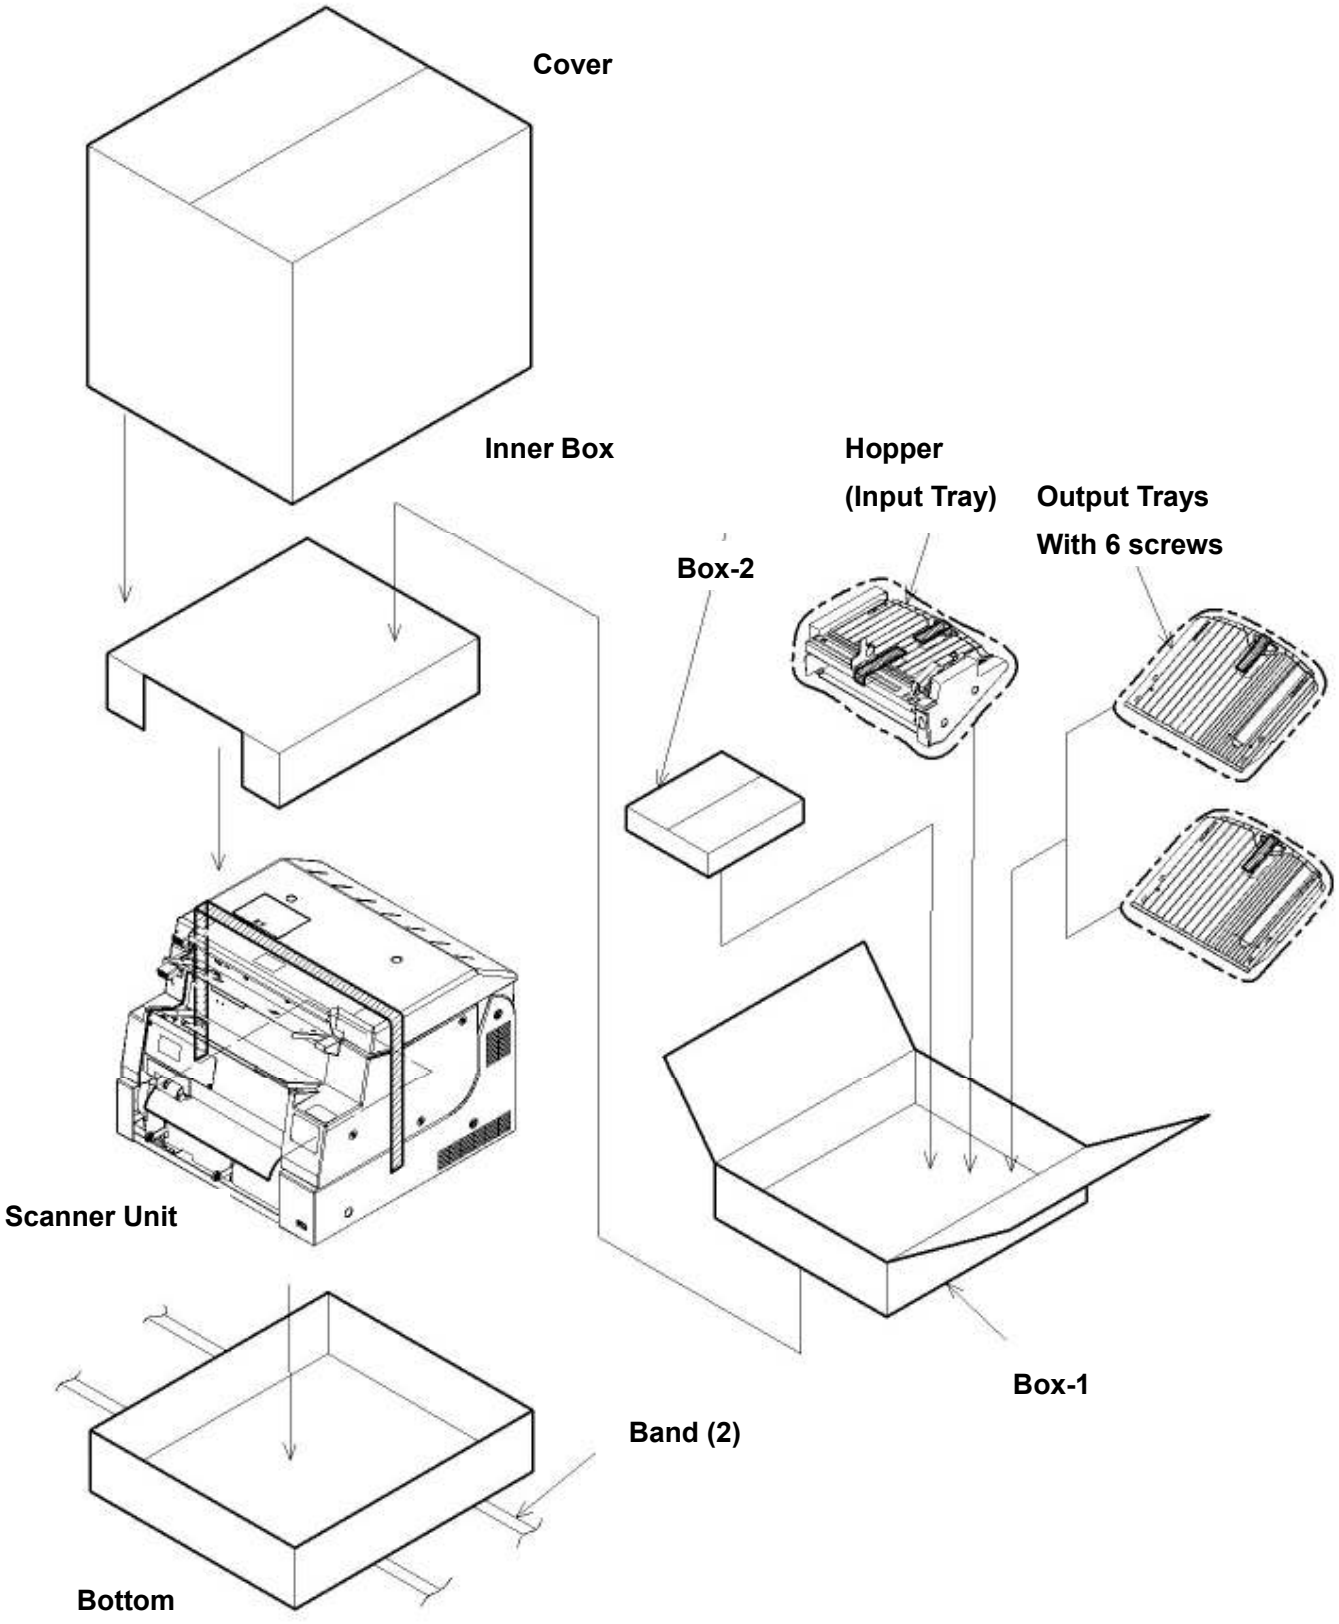

3. Preparation of Scanner Unit Installation

(1) Remove the Tape-1.


(2) Push the Main Latch to open the upper part of the unit.

(3) Remove the Glass Protection Sheet.

(4) Remove the Tape-3 and Support Plate.


(5) Close the upper part of the unit by pushing down the area of the "PUSH" labels.

(6) Remove the Tape-2 and take the Desiccant out.

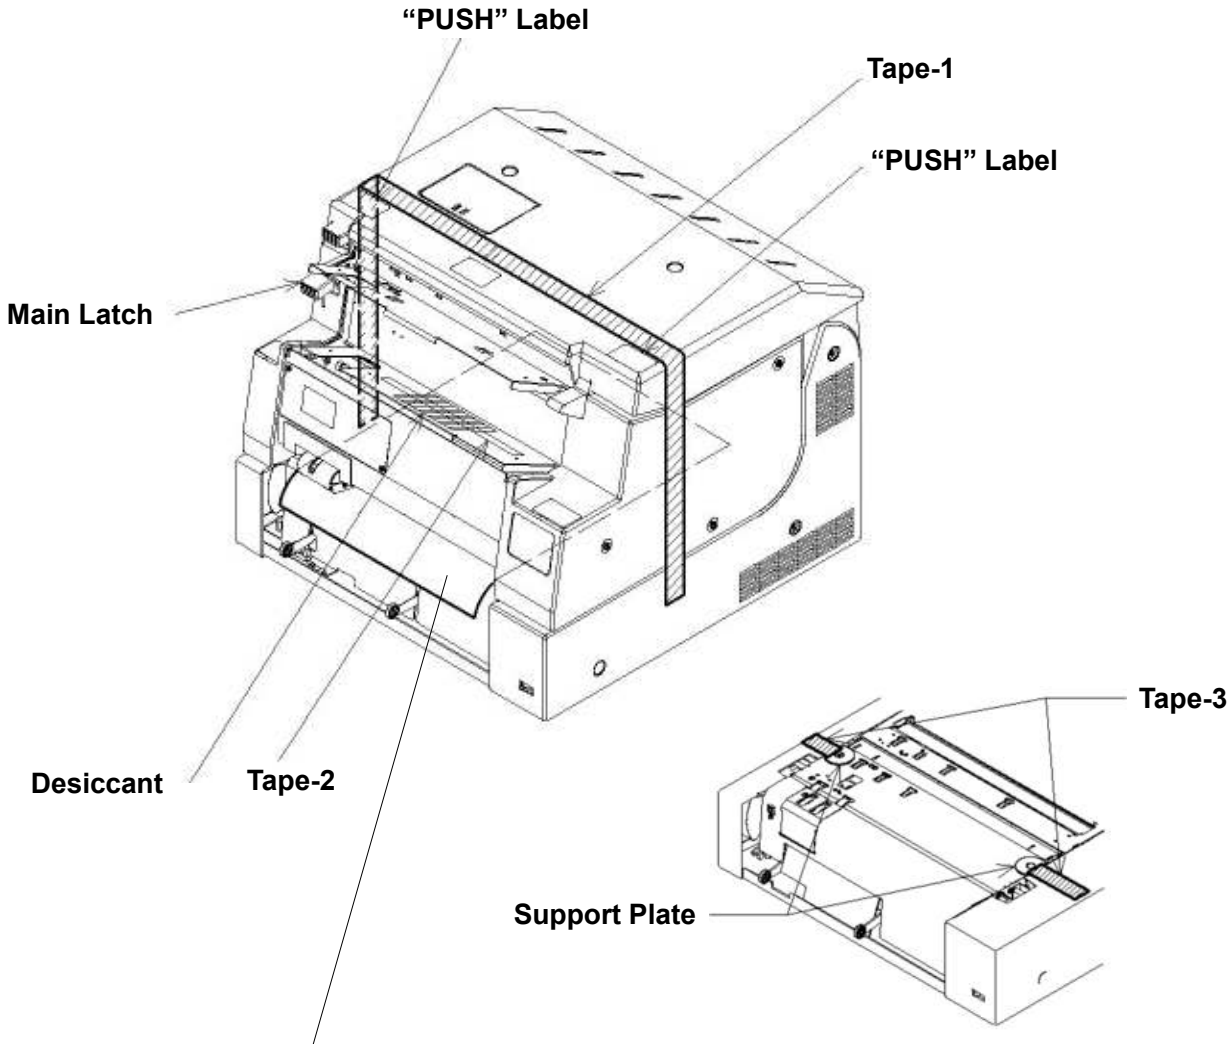

When you pack the unit, put the Mirror Protection Sheet as you can see it about 100mm (4 inches) depth after closing the upper part of the unit.

Refer to the Installation Guide (QG3) to assemble Trays.

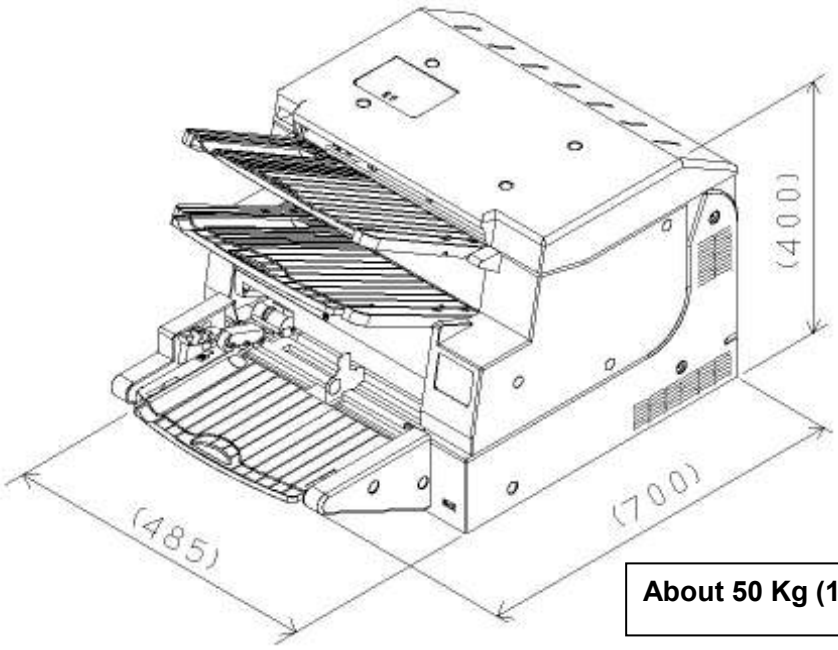

About 50 Kg (110 lb)

4. Contents of the BOX-2


The contents of the Box-2 are shown below.




--- Power Code（PS Cable）



--- USB cable

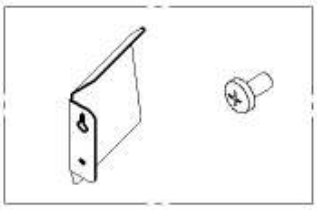

--- Stacker Guide（With 1 screws)
Refer to the Installation Guide (QG3) how to assemble this.

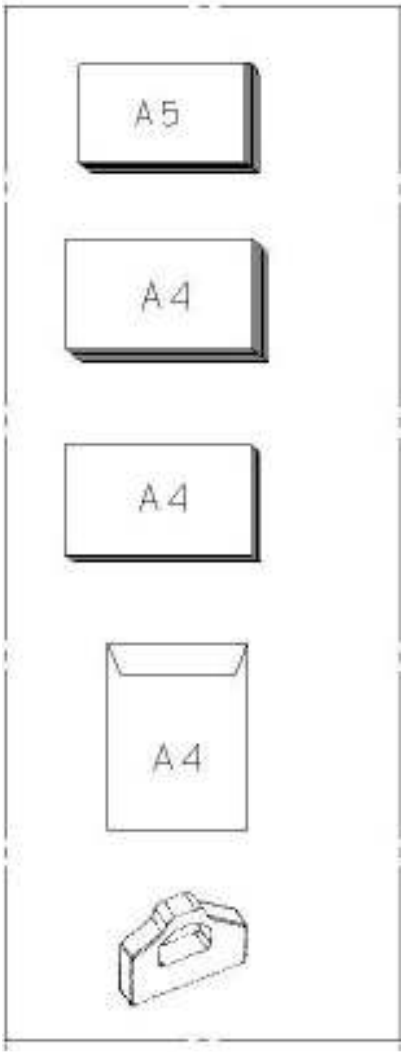

--- Instruction Manual

-- Scanner Driver Installation Guide

-- Quick Guide（QG1 - QG4)

--- Scanner Driver Installation CD

--- Ink Ribbon（Installed in the device）

5. Packing

(1) Take a reverse process for packing.

(2) Put the Glass Protection Sheet and Support Plate back in the Scanner unit.

(3) Fasten bands tightly.

(4) As the Band or tapes are not reusable so use proper ones for return.